





Features:

- ⊙ High Resistivity to Heat, Small Resistance Temp. Coefficient And The Change in Resistance With Temperature Being Linear.
- ⊙ Resistance Value Unchange After Long Use, Good Resistivity to Short Time Overload.
- ⊙ Small in Size, Able to Take Large Load Fit For Use on Heavy Electric Machines And Production Machines.
- ⊙ Multi-Terminal Types And Adjustable Types Available.
- ⊙ Resistance Temp Coeff: $\pm 400, 260 \text{ PPM/ } ^\circ\text{C}$
- ⊙ Short Time Over Load: $\pm 2\% + 0.05 \Omega$.

Constructi



Dimension:

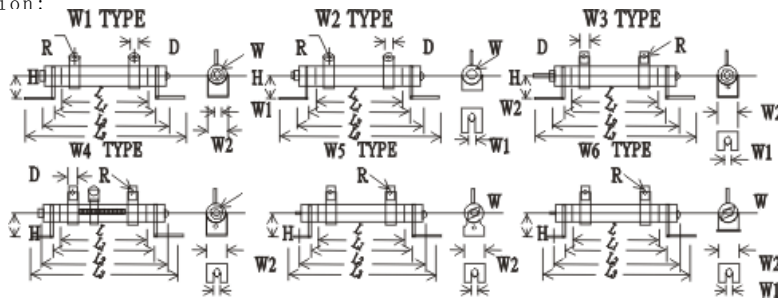

Type	Power	Dimension (mm)										Resistance Range
		L	L1	L2	L3	W	W1	W2	R	D	H	
W1	5W	30	38	45	64	9	4	12	2.2	4	42	0.5-1K Ω
W2	10W	45	53	62	78	12	4.2	18	2.2	4	10	0.5-3K Ω
W3 W4	15W	60	70	83	96	14	3.8	12	2.2	5	10	0.5-8K Ω
	20W	50	60	73	86	18	4.2	18	2.2	5	20	0.5-10K Ω
	25W	60	70	83	96	18	4.2	18	2.2	5	20	0.5-12K Ω
	30W	75	85	98	111	18	4.2	18	2.2	5	20	1-15K Ω
	40W	90	100	113	126	18	4.2	18	2.2	5	20	1-20K Ω
	50W	105	115	128	141	18	4.2	18	2.2	5	20	1-25K Ω
W5	50-70W	90	106	123	139	28	5	30	4.5	8	30	1-25K Ω
	80W	120	136	153	169	28	5	30	4.5	8	30	2-40K Ω
	100W	145	161	178	194	28	5	30	4.5	8	30	2-50K Ω
	120W	160	176	193	209	28	5	30	4.5	8	30	2-60K Ω
	150W	195	211	228	244	28	5	30	4.5	8	30	2-75K Ω
	200W	215	231	248	264	32	5	30	5	10	30	3-100K Ω
	200W	280	296	313	329	28	5	30	4.5	8	30	3-100K Ω
	300W	280	296	313	329	32	5	30	5	10	30	3-150K Ω
	300W	250	266	286	305	47	6	47	6.5	13	43	3-150K Ω
	400W	300	316	336	356	47	6	47	6.5	13	43	5-250K Ω
	500W	300	316	336	356	47	6	47	6.5	13	43	5-250K Ω
500W	300	316	337	357	54	6	54	6.5	15	43	10-300K Ω	
W6	700W	300	316	337	357	54	6	54	6.5	15	43	10-300K Ω
	800W	450	466	487	507	54	6	54	6.5	15	43	10-500K Ω
	1000W	450	466	487	507	54	6	54	6.5	15	43	10-500K Ω
	1500W	600	616	637	657	54	6	54	6.5	15	43	10-650K Ω