

客 戶：
(CUSTOMER) _____

承 認 書

(APPROVE SHEET)

名 稱: 晶片排阻電阻器

(DESCRIPTION) THICK FILM CHIP RESISTOR

貴公司料號碼: _____

(CUSTOMER TYPE NO)

承認 APPROVED BY

豐 雅 電 子 (東 莞) 有 限 公 司

FONG YA ELECTRONIC (DONG GUAN) CO., LTD

地 址: 東 莞 市 石 碣 鎮 黃 泗 圍 工 業 區

HUANGSIWEI INDUSTRIAL AREA, SHIJIE, DONGGUAN, P.R.C.

TEL:86-769-86316268

FAX:86-769-86321078

[Http:www.fongya.com.cn](http://www.fongya.com.cn)

1.0 Scope:

This sheet is the statement of the lead-free chip resistor array-convex terminal specification that FONGYA' productions can meet.

2.0 Type Designation:

The type designation shall be in the following from:

Example

Type	Power rating	Resistance tolerance	Nominal resistance
16P8	1/16W	J	10KΩ


3.0 Ratings & Dimension:

Dimension: mm

2D02	4D02
4D03	16P8

Type	2D02	4D02	4D03	16P8
Power Rating at 70°C	1/16W	1/16W	1/16W	1/16W
Resistance Value of jumper	< 50mΩ	< 50mΩ	< 50mΩ	< 50mΩ
Jumper Rated Current	1A	1A	1A	1A
Max Working Voltage	50V	50V	50V	50V
Max Overload Voltage	100V	100V	100V	100V
Dielectric Withstanding Voltage	100V	100V	300V	300V
±1%	10Ω-1MΩ	10Ω-1MΩ	1Ω-1MΩ	1Ω-1MΩ
±5%	10Ω-1MΩ	10Ω-1MΩ	1Ω-1MΩ	1Ω-1MΩ
Operating Temperature	-55 ~ +155°C			

4.0 Structure:

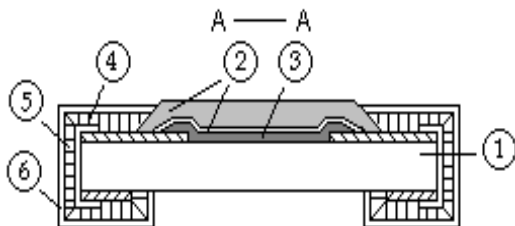


- 1: High purity alumina substrate
(96% AL_2O_3 、0.3±0.1%CaO、1.0±0.3%MgO、
2.1±0.05%SiO₂)
- 2: Protective covering
- 3: Resistive covering (Ag for 0Ω)
- 4: Termination (inner) Ag/Pd
- 5: Termination (between) Ni plating
- 6: Termination (outer) Sn plating

5.0 Marking:

(1) Normal for 2D02 sizes, no marking on the body. 0Ω resistors is no marking too.


EXAMPLE:




(2) ±5% Tolerance of 4D02, 4D03, and 16P8 size: the first two digits are significant figures of resistance and the third denotes number of zeros following

EXAMPLE:

4D02, 4D03



16P8




(3) ±1% Tolerance of 4D02, 4D03, and 16P8 size: first three digits are significant figures of resistance and the fourth denotes number of zeros following

EXAMPLE:

4D02, 4D03




16P8




(4) 0Ω : Normal of 4D02, 4D03, 16P8 size, the marking as following:

EXAMPLE:

4D02, 4D03




16P8

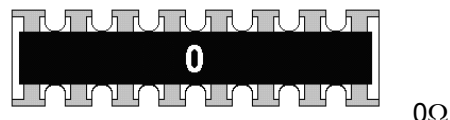

6.0 Power Rating:

Resistors shall have a power rating based on continuous load operation at an ambient temperature of 70°C. For temperature in excess of 70°C, the load shall be derate as shown in figure 1

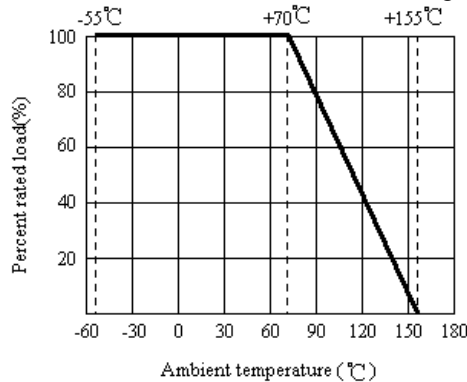

6.1 Voltage rating:

Resistors shall have a rated direct-current (DC) continuous working

voltage or an approximate sine-wave root-mean-square (RMS) alternating-current (AC) continuous working voltage at commercial-line frequency and waveform corresponding to the power rating, as determined from the following formula:

$$RCWV = \sqrt{P \times R}$$

Where: RCWV= Rated dc or RMS ac continuous working voltage at commercial-line frequency and waveform (VOLT.)


P = power rating (VATT.)

R = nominal resistance (OHM)

In no case shall the rated dc or RMS ac continuous working voltage be greater than the applicable maximum value.

7.0 Performance Specification:

Characteristic	Limits		Test Method (JIS-C-5201&5202)
Temperature Coefficient	2D02 4D02	±200PPM/°C	4.8 natural resistance changes per temp. Degree centigrade $\frac{R_2 - R_1}{R_1(T_2 - T_1)} \times 10^6 \text{ (PPM/°C)}$ R ₁ : resistance value at room temp. (T ₁) R ₂ : resistance value at room temp. +100°C (T ₂) Test pattern: room temp. (T ₁), room temp. +100°C (T ₂)
	4D03 16P8	≥ 10 Ω : ±200PPM/°C < 10 Ω : ±400PPM/°C	
*Short-time overload	±(2%+0.1 Ω) MAX		4.13 Permanent resistance change after the application of a potential of 2.5 times RCWV of Max. Overload Voltage whichever less for 5 seconds.
	* <50mΩ		
* Insulation resistance	1,000 MΩ or more		4.6 the measuring voltage shall be ,measured with a direct voltage of (100±15)v or a voltage equal to the dielectric withstanding voltage., and apply for 1min
Terminal bending	±(1%+0.05 Ω) Max		4.33 Twist of test board: Y/x = 3/90 mm for 60Seconds
* Dielectric withstanding voltage	No evidence of flashover mechanical damage, arcing or insulation breaks down.		4.7 Resistors shall be clamped in the trough of a 90 °C metallic v-block and shall be tested at ac potential respectively specified in the given list of each product type for 60-70 seconds.
Soldering heat	Resistance change rate is: ±(1%+0.05 ω) Max		4.18 Dip the resistor into a solder bath having a temperature of 260°C±5°C and hold it for 10±1 seconds.

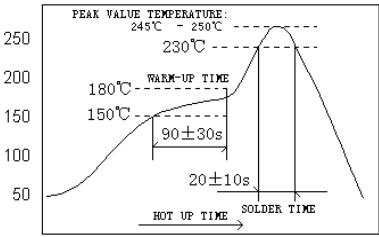*Solderability	95% coverage Min.	Wave solder: Test temperature of solder: 245°C±3°C dipping time in solder: 2-3 seconds.															
	Go up tin rate bigger than half of end pole	Reflow: 															
Temperature cycling	±(1.0%+0.05 Ω) Max	4.19 Resistance change after continuous five cycles for duty cycle specified below: <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>STEP</th> <th>TEMPERATURE</th> <th>TIME</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td style="text-align: center;">-55°C±3°C</td> <td style="text-align: center;">30 MINS</td> </tr> <tr> <td style="text-align: center;">2</td> <td style="text-align: center;">ROOM TEMP.</td> <td style="text-align: center;">10 --- 15 MINS</td> </tr> <tr> <td style="text-align: center;">3</td> <td style="text-align: center;">+155°C±2°C</td> <td style="text-align: center;">30 MINS</td> </tr> <tr> <td style="text-align: center;">4</td> <td style="text-align: center;">ROOM TEMP.</td> <td style="text-align: center;">10 --- 15 MINS</td> </tr> </tbody> </table> <p>*Step1-4 Continuous 5 cycles</p>	STEP	TEMPERATURE	TIME	1	-55°C±3°C	30 MINS	2	ROOM TEMP.	10 --- 15 MINS	3	+155°C±2°C	30 MINS	4	ROOM TEMP.	10 --- 15 MINS
STEP	TEMPERATURE	TIME															
1	-55°C±3°C	30 MINS															
2	ROOM TEMP.	10 --- 15 MINS															
3	+155°C±2°C	30 MINS															
4	ROOM TEMP.	10 --- 15 MINS															
*Load life in humidity	±(3%+0.1Ω)MAX.	7.9 Resistance change after 1,000 hours (1.5 hours "ON", 0.5 hour "OFF") at RCWV in a humidity chamber controlled at 40°C±2°C and 90 to 95% relative humidity.															
	* <50mΩ	Apply to rated current for 0 Ω															
*Load life	±(3%+0.1Ω)Max	4.25.1 Permanent resistance change after 1,000 hours operating at RCWV with duty cycle 1.5 hours "ON", 0.5 hour "OFF" at 70°C±2°C ambient.															
	* <50mΩ	Apply to rated current for 0 Ω															

The resistors of 0 Ω only can do the characteristic noted of *

8.0 Explanation of Part No. System:

The standard Part No. includes 14 digits with the following explanation:

8.1 This is to indicate the Chip Array Resistor size.

Example: 2D02, 4D02, 4D03, 16P8

8.2 5th~6th digits:

8.2.1 This is to indicate the wattage or power rating. To dieting the size and the numbers,

The following codes are used; and please refer to the following chart for detail:

W=Normal Size; S=Small Size; U=Extra Small Size; "1" ~ "G" to denotes "1" ~ "16" as

Hexadecimal:

1/16W~1W:

Wattage	1/2	1/3	1/4	1/5	1/6	1/8	1/10	1/16	1
Normal Size	W2	W3	W4	W5	W6	W8	WA	WG	1W
Small Size	S2	S3	S4	S5	S6	S8	SA	SG	1S

8.2.1 For power rating less than 1 watt, the 5th digit will be the letters W or S to represent the size required & the 6th digit will be a number or a letter code.

Example:

WA=1/10W; S4=1/4W-S

8.3 The 7th digit is to denote the Resistance Tolerance. The following letter code is to be used for indicating the standard Resistance Tolerance.

F=±1% G=±2% J=±5% K= ±10%

8.4 The 8th to 11th digits is to denote the Resistance Value.

8.4.1 For the standard resistance values of E-24 series, the 8th digit is “0” ,the 9th & 10th digits are to denote the significant figures of the resistance and the 11th digit is the number of zeros following;

For the standard resistance values of E-96 series, the 8th digit to the 10th digits is to denote the significant figures of the resistance and the 11th digit is the zeros following.

8.4.2 The following number s and the letter codes are to be used to indicate the number of zeros in the 11th digit:

0=10⁰ 1=10¹ 2=10² 3=10³ 4=10⁴ 5=10⁵ 6=10⁶ J=10⁻¹ K=10⁻² L=10⁻³ M=10⁻⁴

8.4.3 The 12th, 13th & 14th digits.

The 12th digit is to denote the Packaging Type with the following codes:

C=Bulk in (Chip Product) T=Tape/Reel

8.4.4 The 13th digit is normally to indicate the Packing Quantity of Tape/Box & Tape/Reel packaging types. The following letter code is to be used for some packing quantities:


1=1000pcs 2=2000pcs 3=3000pcs 4=4000pcs
5=5000pcs C=10000pcs D=20000pcs E=15000pcs

Chip Product: BD=B/B-20000pcs TC=T/R-10000pcs

8.4.5 For some items, the 14th digit alone can use to denote special features of additional information with the following codes:


E=For “Environmental Protection, Lead Free type” of Chip, Chip Array or Chip Network Resistors.

9.0 Ordering Procedure: (Example: 4D03 1/16W ±5% 10KΩ T/R-5000)

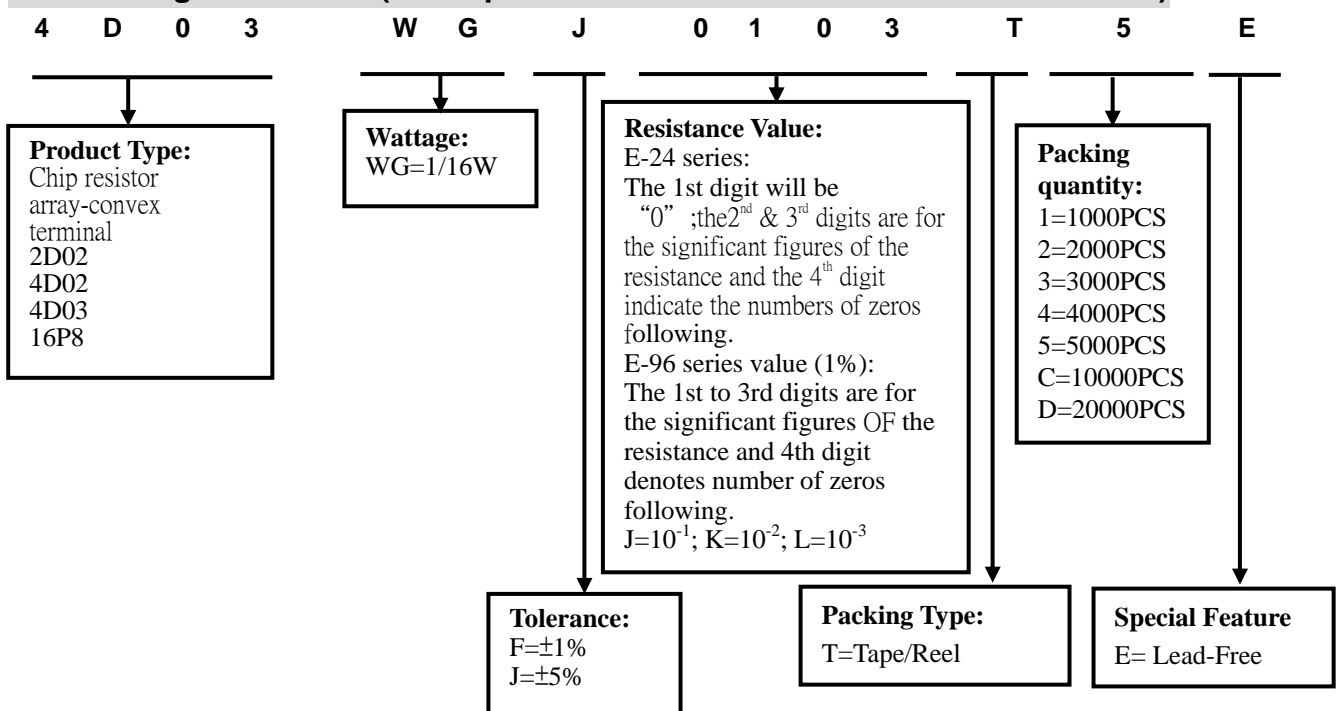


10.0 Packaging:

10.1 Tapping Dimension:

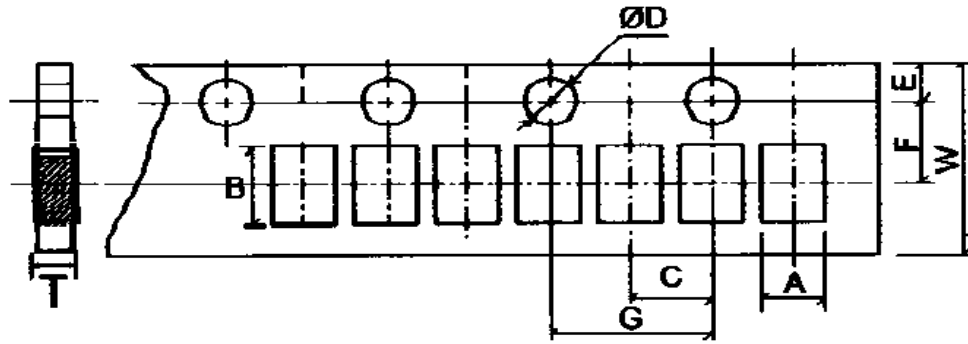

UNIT: mm


TYPE	A ±0.2	B ±0.2	C±0.05	$\begin{matrix} +0.1 \\ \Phi D \\ -0 \end{matrix}$	E±0.1	F±0.05	G±0.1	W±0.2	T±0.1
2D02	1.2	1.2	2.0	1.5	1.75	3.5	4.0	8.0	0.45
4D02	1.2	2.2	2.0	1.5	1.75	3.5	4.0	8.0	0.70

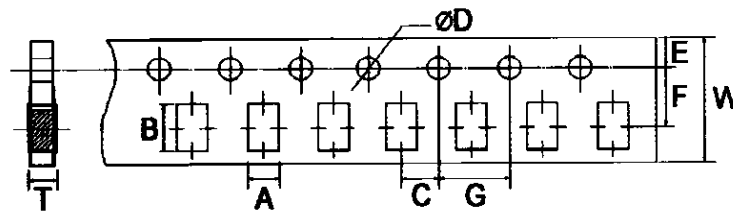

UNIT: mm

TYPE	A ±0.2	B ±0.2	C±0.05	$\begin{matrix} +0.1 \\ \Phi D \\ -0 \end{matrix}$	E±0.1	F±0.05	G±0.1	W±0.2	T±0.1
4D03	2.0	3.60	2.0	1.5	1.75	3.5	4.0	8.0	0.83
16P8	1.80	4.30	2.0	1.5	1.75	5.5	4.0	12.0	0.75

10.2 Dimension:

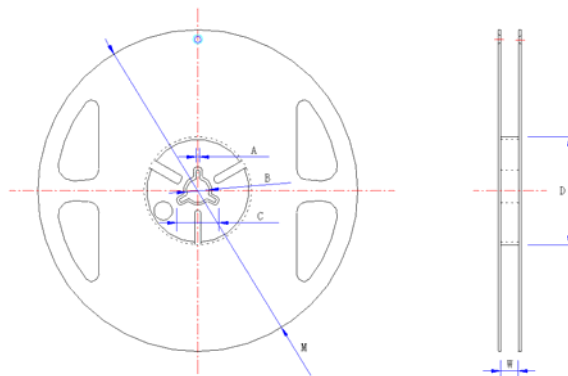

UNIT: mm

TYPE	QUANTITY PER REEL	A ± 0.5	B ± 0.5	C ± 0.5	D ± 1.0	M ± 2.0	W ± 1.0
2D02	10,000PCS	2.0	13.0	21.0	60.0	178.0	10.0

4D02	10,000PCS	2.0	13.0	21.0	60.0	178.0	10.0
4D03	5,000PCS	2.0	13.0	21.0	60.0	178.0	10.0
16P8	4,000PCS	2.0	13.0	21.0	60.0	178.0	13.8

11.0 Storage:

The products should be placed in the dry and ventilation with 5~35°C and lower than 25~75%rh, and prevent it from pressing and humidity. The guaranteed period of product performance is within one year from shipment by the company, provided that the above-mentioned storage conditions have been satisfied.